

# SIDEWALK INSPECTION BOROUGH OF BATH


DATE: \_\_\_\_\_

LOCATION/ADDRESS OF DEFECT: \_\_\_\_\_

PROPERTY OWNER NAME: \_\_\_\_\_

PROPERTY OWNER ADDRESS: \_\_\_\_\_

INSPECTOR: \_\_\_\_\_ DATE PASSED INSPECTION: \_\_\_\_\_

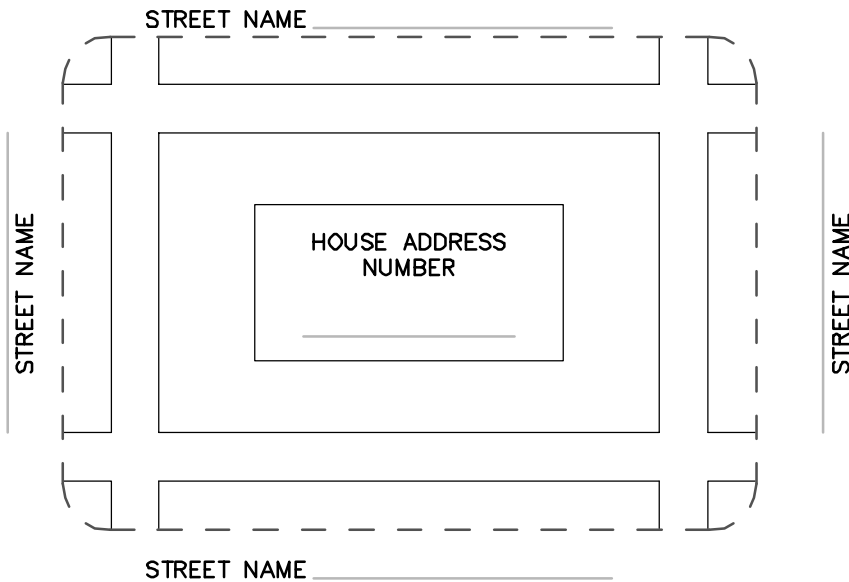

TYPE OF DEFECT	# OF SQUARES

**TYPE A**

**SIDEWALK**

- IS DISPLACED 1/2 INCH OR MORE VERTICALLY AT ANY POINT IN THE PANEL

**TYPE B1**

**SIDEWALK:**

- SIDEWALK IS RAISED MORE THAN 4 INCHES FROM THE NORMAL LINE OF GRADE

**TYPE B2 ANY OF THE FOLLOWING:**

**SIDEWALK**

- IS DEPRESSED MORE THAN 4 INCHES FROM THE NORMAL LINE OF GRADE
- PONDS WATER
- COLLECTS DEBRIS

**TYPE C1 ANY OF THE FOLLOWING:**

**SIDEWALK**

- IS CRACKED INTO 4 OR MORE PIECES
- IS MISSING A PIECE EQUAL TO OR EXCEEDING 16 SQUARE INCHES
- IS MISSING A FULL DEPTH PIECE OF ANY SIZE

**TYPE C2**

**SIDEWALK**

- IS MISSING 3 PIECES OR LESS, WITH EACH PIECE BEING LESS THAN 16 SQUARE INCHES, BUT GREATER THAN 4 SQUARE INCHES

**TYPE D1 ANY OF THE FOLLOWING:**

**SIDEWALK**

- IS SPALLED 75% OR MORE OVER SURFACE
- HAS A SPALLED AREA DEEPER THAN 1/2 INCH
- HAS LOOSE OR DETERIORATING DAMAGE OVER THE MAJORITY OF THE SURFACE
- DOES NOT DRAIN PROPERLY

**TYPE D2 EITHER OF THE FOLLOWING:**

**MINOR SURFACE DAMAGE:**

- SIDEWALK IS SPALLED BETWEEN 50%-75% OVER SURFACE
- MAJORITY OF THE PANEL DEEMED STRUCTURALLY SOUND WITHOUT DRAINAGE ISSUES.

**TYPE E1 ANY OF THE FOLLOWING:**

**SIDEWALK**

- HAS SEPARATION EQUAL TO OR EXCEEDING 1/2 INCH AT ANY POINT IN THE PANEL
- HAS MORE THAN ONE SEPARATION
- HAS ELEVATION OR DRAINAGE ISSUES
- HAS SHIFTED MORE THAN 2 INCHES

Ⓐ GREATER THAN 1/2 INCH  
Ⓑ GREATER THAN 2 INCHES

**TYPE E2**

**SIDEWALK**

- HAS ONE SEPARATION GREATER THAN 1/4 INCH AND LESS THAN 1/2 INCH AT ANY POINT IN THE PANEL
- IS LEVEL
- HAS NO OTHER APPARENT HAZARDS

**WIDTH OF SIDEWALK:**  4 FT  8 FT  \_\_\_\_\_ FT      **APPROX. SQUARE FEET TO BE REPAIRED:** \_\_\_\_\_